



JELD-WEN®

INTERIOR DOORS

MOLDED | FLUSH | STUDIO™ | TRIA™
MODA® | AUTHENTIC WOOD



INTERIOR DOORS FOR EVERY SPACE

JELD-WEN offers a complete line of interior doors fitting your style and budget. With one of the widest selections available, there's an interior door for every application. From simple, contemporary doors to highly ornate — you decide. Find interior doors to inspire your spaces with JELD-WEN.



MODA° PMP1035

INTERIOR DOORS AT A GLANCE



MOLDED

So many possibilities for transforming a room, with your choice of styles, colors and finishes.

PAGES 6-25



FLUSH

Keep it simple. Dependable, economical doors that combine strength and beauty.

PAGES 26-29



STUDIO™

Crisp detail defines these modern doors. Choose from two contemporary styles.

PAGES 30-35



TRIA™

Made-to-order doors that artfully reflect your style. Explore all the brilliant details.

PAGES 36-43



MODA®

Clean lines, stunning effect come together in a complete line of doors for every space.

PAGES 44-47



AUTHENTIC WOOD

Rich, elegant wood elevates the look of any doorway. Customizable features let you design.

PAGES 48-53



MOLDED INTERIOR DOOR


ADD STYLE TO YOUR SPACES

With a wide variety of panel styles to choose from, there's a door for every aesthetic. Explore all the options to find the ideal complement to your room.


MOLDED DOOR OPTIONS

STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




CRAFTSMAN STICKING



STEPPED STICKING




OVOLO STICKING




COVE & BEAD STICKING


AVAILABLE SIZES



14 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1-3/8" OR 1-3/4"

CORE OPTIONS




**PROCORE®
SOLID CORE**
Combination wood/
MDF or all-wood frame



20-minute
fire rating

PROCORE
THE QUIET DOOR®




**SOLID MINERAL
CORE**

All-wood frame



90-minute*
fire rating

*Available in raised
panel designs only



**HOLLOW
CORE**

Wood/MDF frame

Blocking behind
panels for support

FINISHING OPTIONS

Choose the stain or paint that suits your style. We'll do the work. Our factory finish process saves you time and creates a more durable finish than an at-home paint job.


PAINTED *

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 33 hues.



WOODVIEW™ COLLECTION *

Woodview™ Collection finishing involves a two-tone color process, creating the look of real wood without the maintenance.

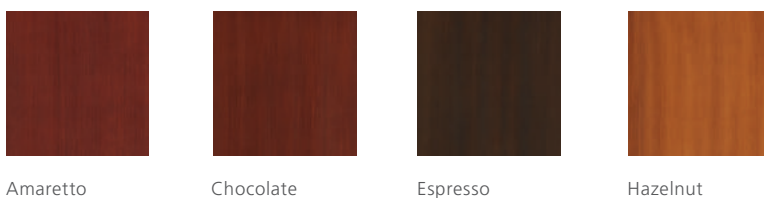

*1-Year Factory Applied Prefinish Warranty. See jeld-wen.com for details.

Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.







STATEMENT™ DENIM ON SANTA FE™

STATEMENT™ COLLECTION *

Statement™ Collection finishing delivers an artisan, hand-brushed effect. On-trend colors and texture blend for a beautiful appearance.



Black Cherry



Denim



Juniper




Saffron



Stone

RAISED PANEL




SANTA FE™

Smooth

Ovolo Sticking

6'8", 7'0" & 8'0"

Product Details pg. 12




CAMBRIDGE™

Smooth

Ovolo Sticking

6'8", 7'0" & 8'0"

Product Details pg. 13




CARRARA®

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 14




CAIMAN®

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 15




CAMDEN®

Textured

Cove & Bead Sticking

6'8" & 7'0"

Product Details pg. 16




ROCKPORT™

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 17




COLONIST®

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 18



COLONIST®

Textured

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 19



IMPRESSION™ MIRROR

Textured


6'8" Only

Opposite Side Colonist Textured


Product Details pg. 19

Selection varies by market. See your JELD-WEN sales representative for details.


FLAT PANEL




MADISON®
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 20




MONROE®
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 21



BIRKDALE™
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 22




CRAFTSMAN III™
Smooth
Craftsman Sticking
6'8" & 7'0"
Product Details pg. 23




CONMORE®
Smooth
Stepped Sticking
6'8" & 7'0"
Product Details pg. 24

For bifold product details, see pg. 29


COMMERCIAL WIDE STILE



COLONIST®
Smooth Wide Stile
Cove & Bead Sticking
6'8" & 7'0"
Product Details pg. 25




CAMBRIDGE™
Smooth Wide Stile
Ovolo Sticking
6'8" & 7'0"
Product Details pg. 25



CONTINENTAL™
Smooth Wide Stile
Ovolo Sticking
6'8" & 7'0"
Product Details pg. 25

Selection varies by market. See your JELD-WEN sales representative for details.

PRODUCT DETAIL




SANTA FE™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	O	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	O	Smooth	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	O	Smooth	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	O	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	O	Smooth	•	•	•
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	O	Smooth	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	O	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-3/8"	7"	9-7/8"	O	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-3/8"	7"	9-7/8"	O	Smooth	•	•	•
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-3/8"	7"	9-7/8"	O	Smooth	•	•	•
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-3/8"	7"	9-7/8"	O	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	O	Smooth	•	•	•
2'8"	8'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	O	Smooth	•	•	•
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-3/8"	7"	9-7/8"	O	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAMBRIDGE™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16"	3-7/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-9/16"	3-7/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-9/16"	3-7/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	13-11/16"	4-5/32" (1'10") 5-5/32" (2'0")	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	4-5/32" (2'2") 5-5/32" (2'4")	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-11/16"	5-5/32" (2'10") 6-5/32" (3'0")	N/A	4-7/16" (6'8") 6-1/4" (7'0")	7"	8-15/16" (6'8") 11-1/8" (7'0")	0	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	9-3/4"	4-1/8" (1'6") 5-1/8" (1'8")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	13-11/16"	4-5/32" (1'10") 5-5/32" (2'0")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	17-11/16"	4-5/32" (2'2") 5-5/32" (2'4")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
2'8"	8'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32"	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	23-11/16"	5-5/32" (2'10") 6-5/32" (3'0")	N/A	4-7/16"	7"	8-15/16"	0	Smooth	•	•	•


CARRARA®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-15/16"	3" (1'6") 4" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'0") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7-1/16"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	11-15/16"	3" (1'6") 4" (1'8")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAIMAN®

Panel Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-11/16"	1-15/32" (1'0") 2-15/32" (1'2") 2-31/32" (1'3") 3-15/32" (1'4")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1/32" (1'8")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	9-11/16"	1-15/32" (1'0") 2-15/32" (1'2") 2-31/32" (1'3") 3-15/32" (1'4")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1/32" (1'8")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•


CAMDEN®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-11/16"	2-21/32"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-1/2"	3-1/4" (1'2") 3-3/4" (1'3") 4-1/4" (1'4")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14-15/16"	3-17/32" (1'10") 4-17/32" (2'0") 5-17/32" (2'2")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18-1/8"	4-15/16"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-13/16"	4-19/32" (2'8") 5-19/32" (2'10")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	25"	5-1/2"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A


STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



ROCKPORT™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	5-7/8"	3-1/16"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	8-7/8"	2-9/16" (1'2") 3-1/16" (1'3") 3-9/16" (1'4")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	10-1/4"	3-7/8" (1'6") 4-7/8" (1'8")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'10" 2'10"	6'8" 7'0"	Five	1-3/8" 1-3/4"	15-3/4"	3-1/8" (1'10") 4-1/8" (2'0")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'2" 2'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	19-3/4"	3-1/8" (2'2") 4-1/8" (2'4")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	21-3/4"	4-1/8"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	23-3/4"	4-1/8"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'10" 3'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	25-3/4"	4-1/8" (2'10") 5-1/8" (3'0")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'0" 1'2" 1'3" 1'4" 1'6" 1'8"	8'0"	Six	1-3/8" 1-3/4"	8-1/2"	1-3/4" (1'0") 2-3/4" (1'2") 3-1/4" (1'3") 3-3/4" (1'4") 4-3/4" (1'6") 5-3/4" (1'8")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1-3/8" 1-3/4"	14-1/2"	3-3/4" (1'10") 4-3/4" (2'0") 5-3/4" (2'2")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'4"	8'0"	Six	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'6"	8'0"	Six	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
3'0"	8'0"	Six	1-3/8" 1-3/4"	25-3/4"	5-1/8"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A




COLONIST® SMOOTH

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
2'4"	6'8" 7'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
2'6"	6'8" 7'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
3'0"	6'8" 7'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
1'6" 1'8"	8'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

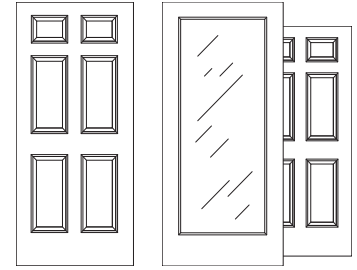

COLONIST® TEXTURED


Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-7/8"	3-1/16" (1'6") 4-1/16" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1-3/8" 1-3/4"	6"	3-1/8" (1'10") 4-1/8" (2'0") 5-1/8" (2'2")	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8"	4-1/8"	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9"	4-1/8"	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Six	1-3/8" 1-3/4"	10"	4-1/8" (2'8") 5-1/8" (2'10")	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	12"	4-1/8"	3-13/16"	4-1/4" (6'8") 6-1/4" (7'0")	6-13/16"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Pine Grain	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4"	6-7/8"	8-1/4"	CB	Pine Grain	N/A	•	N/A
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	11-7/8"	3" (1'6") 4" (1'8")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1-3/8" 1-3/4"	6"	3-1/8" (1'10") 4-1/8" (2'0") 5-1/8" (2'2")	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
2'4"	8'0"	Six	1-3/8" 1-3/4"	8"	4-1/8"	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
2'6"	8'0"	Six	1-3/8" 1-3/4"	9"	4-1/8"	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1-3/8" 1-3/4"	10"	4-1/8" (2'8") 5-1/8" (2'10")	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A
3'0"	8'0"	Six	1-3/8" 1-3/4"	12"	4-1/8"	3-3/4"	5-1/4"	6-13/16"	8-1/4"	CB	Pine Grain	N/A	•	N/A

IMPRESSION™ MIRROR

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
2'0"	6'8"	One	1-3/8"	15-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'4"	6'8"	One	1-3/8"	19-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'6"	6'8"	One	1-3/8"	21-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'8"	6'8"	One	1-3/8"	23-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
3'0"	6'8"	One	1-3/8"	27-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A

REVERSE IS COLONIST 6-PANEL TEXTURE ONLY


MADISON®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2"	6'8" 7'0"	One	1-3/8" 1-3/4"	5-3/8"	3-5/16" (1'0") 4-5/16" (1'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'3" 1'4" 1'6"	6'8" 7'0"	One	1-3/8" 1-3/4"	7-13/16"	3-9/32" (1'3") 4-3/32" (1'4") 5-3/32" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	One	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	One	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'4"	6'8" 7'0"	One	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'6"	6'8" 7'0"	One	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	One	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
3'0"	6'8" 7'0"	One	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4" 1'6"	8'0"	One	1-3/8" 1-3/4"	7-13/16"	2-3/32" (1'0") 3-3/32" (1'2") 3-19/32" (1'3") 4-3/32" (1'4") 5-3/32" (1'6")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
1'8" 1'10"	8'0"	One	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'0" 2'2"	8'0"	One	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'4"	8'0"	One	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'6"	8'0"	One	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'8" 2'10"	8'0"	One	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
3'0"	8'0"	One	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



MONROE®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'2" 1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-1/2"	3-1/2" (1'2") 3-3/4" (1'3")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4" 1'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/4"	1-3/8" (1'0") 2-3/8" (1'2") 2-7/8" (1'3") 3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'4" 1'6"	8'0"	Two	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
1'8" 1'10"	8'0"	Two	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•


BIRKDALE™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'2" 1'3"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/2" (1'2") 3-3/4" (1'3")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'4" 1'6"	6'8" 7'0"	Three	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'6"	6'8" 7'0"	Three	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Three	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'0"	8'0"	Three	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'2" 1'3"	8'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/4" (1'2") 3-3/4" (1'3")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'4" 1'6"	8'0"	Three	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'8" 1'10"	8'0"	Three	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'0" 2'2"	8'0"	Three	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'4"	8'0"	Three	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'6"	8'0"	Three	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'8" 2'10"	8'0"	Three	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
3'0"	8'0"	Three	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CRAFTSMAN III™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	4"	4"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6"	4"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-1/4"	3-3/8" (1'3") 3-7/8" (1'4")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'6" 1'8" 1'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8") 6" (1'10")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15"	4-1/2"	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'2" 2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	17"	4-1/2" (2'2") 5-1/2" (2'4")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'6" 2'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	21"	4-1/2" (2'6") 5-1/2" (2'8")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'10" 3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	25"	4-1/2" (2'10") 5-1/2" (3'0")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•

CONMORE®




Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	6-25/32"	2-19/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'2"	6'8" 7'0"	Five	1-3/8" 1-3/4"	9-1/16"	2-15/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'3" 1'4" 1'6" 1'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	9-11/16"	2-21/32" (1'3") 3-5/32" (1'4") 4-5/32" (1'6") 5-5/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Five	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	19-11/16"	4-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	21-11/16"	4-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Five	1-3/8" 1-3/4"	23-11/16"	4-5/32" (2'8") 5-5/32" (2'10")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
3'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	25-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'0"	8'0"	Five	1-3/8" 1-3/4"	6-25/32"	2-19/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'2"	8'0"	Five	1-3/8" 1-3/4"	9-1/16"	2-15/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'3" 1'4" 1'6" 1'8"	8'0"	Five	1-3/8" 1-3/4"	9-11/16"	2-21/32" (1'3") 3-5/32" (1'4") 4-5/32" (1'6") 5-5/32" (1'8")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Five	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'4"	8'0"	Five	1-3/8" 1-3/4"	19-11/16"	4-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'6"	8'0"	Five	1-3/8" 1-3/4"	21-11/16"	4-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'8" 2'10"	8'0"	Five	1-3/8" 1-3/4"	23-11/16"	4-5/32" (2'8") 5-5/32" (2'10")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
3'0"	8'0"	Five	1-3/8" 1-3/4"	25-11/16"	5-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


COMMERCIAL WIDE STILE

CAMBRIDGE™, COLONIST® AND CONTINENTAL™

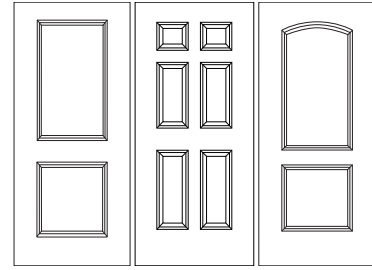

Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
3'0" Cambridge™ Beaded	6'8" 7'0"	Two	1-3/8" 1-3/4"	23"	6-1/2"	N/A	4-7/16" (6'8") 6-1/4" (7'0")	6-3/8"	11-11/16" (6'8") 13-7/8" (7'0")	O	Smooth	N/A	•	N/A
3'0" Colonist®	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-5/8"	6-1/2"	3-3/4"	5-7/8" (6'8") 7-7/8" (7'0")	6-3/4"	10-5/8" (6'8") 12-5/8" (7'0")	CB	Smooth	N/A	•	N/A
3'0" Continental™	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	6"	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth	N/A	•	N/A

BIFOLDS



Door Design	Heights*	No. of Panels	Thickness	Widths* 2 doors or 1 unit	Widths* 4 doors or 2 units
Caiman®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Cambridge™	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Camden®	6'7"; 6'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Carrara®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Colonist®	6'7"; 6'11"; 7'11"	6	1-3/8"	1'6"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'0"; 3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Conmore®	6'7"; 6'11"	10	1-3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Craftsman III™	6'7"; 6'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Madison®	6'7"; 6'11"; 7'11"	2	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Monroe®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Rockport™	6'7"; 6'11"; 7'11"	10	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Santa Fe™	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Birkdale™	6'7"; 6'11"; 7'11"	6	1-3/8"	1'6"; 1'8"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'0"; 3'4"; 3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"




FLUSH INTERIOR DOOR

SIMPLICITY AND RELIABILITY MEET


Our flush interior doors are offered in a variety of colors and woodgrains. They are built to endure everyday life, so you can be confident in their durability. All flush interior doors are available with ProCore The Quiet Door® construction, reducing sound transmission.

FLUSH DOOR OPTIONS


AVAILABLE SIZES



16 WIDTHS BETWEEN 1'0" - 4'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1-3/8" OR 1-3/4"

CORE OPTIONS




PROCORE® SOLID CORE

Wood or MDF frame



20-minute fire rating

PROCORE
THE QUIET DOOR®




SOLID MINERAL CORE

Mineral composite frame



90-minute fire rating



HOLLOW CORE

Combination wood/MDF frame

Corrugated honeycomb cell core

FINISHING OPTIONS

You choose whether your flush door arrives unfinished, primed and/or embossed. Or let us paint your door for you; our factory finish process saves you time and creates a more durable finish than an at-home paint job.

UNFINISHED HARDWOOD VENEER

Choose from several species. Check with your dealer for availability.



Sliced Red Oak
Slab and Bifold



Rotary-Cut Birch
Slab and Bifold



Hardwood
Slab and Bifold

Doors are for interior applications only.




PRIMED AND EMBOSSED HARDWOOD

Primed options arrive ready to paint. Embossed doors offer the look of real stained wood.



Primed



Imperial Oak
Embossed



*1-Year Factory Applied Prefinish Warranty. See jeld-wen.com for details.

Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.

PAINTED *

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 33 hues.



Modern White



Brilliant White



Fog



Graphite



Granite



Slate



Black



Ash



Driftwood



Linen



Flagston



Timber Gray



French Vanilla



Bisque



Desert Sand



Pottery



Dark Chocolate



Chestnut Bronze



Cranberry



Mesa Red



Currant



Surf



Evergreen



Hartford Green



Serenity



Colony



Revival Blue



Eclipse



Marine



Caribbean Blue



Blue Heron



Persimmon



Marigold

FLUSH INTERIOR DOOR FEATURES

Doors	Thickness	Core	Stiles	Top and Bottom Rails	Lock Block	Construction	Standards
Particleboard Core Doors	1-3/8" 1-3/4"	Solid particleboard, mat-formed wood particleboard with density of approximately 28 lbs./cu ft. Meets or exceeds all industry requirements, including ANSI A 208.1, 1-LD-1 or 1-LD-2.	15/16" stile for 1-3/8" thick 1-1/16" stile for 1-3/4" thick	7/8" top rail and 2" bottom rail for 1-3/8" Thick 1" top rail and 2-1/4" bottom rail for 1-3/4" Thick	n/a	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests (1-3/4" only). WHI is an approved ICBO quality control agency.
Hollow Core Doors	1-3/8"	Expanded corrugated honeycomb to provide rigid strength.	15/16"	7/8" top rail and 2" bottom rail	3-1/2" x 16" both sides	5-ply when using 2-ply hardwood faces.	n/a
20-Minute Fire Doors (Neutral Pressure)	1-3/4"	Solid particleboard, mat-formed wood particleboard with density of approximately 28 lbs./cu ft. Meets or exceeds all industry requirements, including ANSI A 208.1, 1-LD-1 or 1-LD-2.	1-3/4"	1-3/4"	n/a	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests. WHI is an approved ICBO quality control agency.
90-Minute Fire Doors (Neutral Pressure)	1-3/4"	Homogeneous mineral non-asbestos. Meets or exceeds all industry requirements.	1-5/16" composite stile with 5/16" wood band.	1-3/4"	n/a	5-ply when using 2-ply hardwood faces.	Warnock Hersey International approved to fire endurance tests. WHI is an approved ICBO quality control agency.




STUDIO™ COLLECTION

CONTEMPORARY INTERIOR DOORS


The Studio™ Collection brings a new perspective to the interior door. Highlighting accent details on smooth surfaces, these doors present a distinct look.

STUDIO™ DOOR OPTIONS


AVAILABLE SIZES



10 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8" OR 7'0"



THICKNESSES OF 1-3/8" OR 1-3/4"

CORE OPTIONS




PROCORE® SOLID CORE

Wood or MDF frame



20-minute fire rating

ProCORE
THE QUIET DOOR®



HOLLOW CORE

Combination wood/MDF frame

Corrugated honeycomb cell core


Not recommended for use with double door or bifold door applications due to alignment issues.

FINISHING OPTIONS

Choose the stain or paint that suits your style. We'll do the work. Our factory finish process saves you time and creates a more durable finish than an at-home paint job.

PAINTED *

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you. Select from 33 hues.



Modern White



Brilliant White



Fog



Graphite



Granite



Slate



Black



Ash



Driftwood




Linen



Flagston



Timber Gray



French Vanilla



Bisque



Desert Sand



Pottery



Dark Chocolate



Chestnut Bronze



Cranberry



Mesa Red



Currant



Surf



Evergreen



Hartford Green



Serenity



Colony



Revival Blue



Eclipse



Marine



Caribbean Blue



Blue Heron



Persimmon




Marigold


STATEMENT™ COLLECTION *

Statement™ Collection finishing delivers an artisan, hand-brushed effect.

On-trend colors and texture blend for a beautiful appearance.



Black Cherry



Denim



Juniper



Saffron




Stone

*1-Year Factory Applied Prefinish Warranty. See jeld-wen.com for details.

Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.

STUDIO™ COLLECTION



SL100

Molded

6'8" & 7'0"

Product Details pg. 34



SL130

Molded

6'8"


Product Details pg. 35

Not recommended for use with double door or bifold door applications due to alignment issues.



PRODUCT DETAIL

SL100



Width	Height	Thickness	Groove Width	Horizontal Grooves	No. of Panels	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'8"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'10"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'0"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'2"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'4"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'6"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'8"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'10"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
3'0"	6'8"	1-3/8"	3/8"	3	4	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'6"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'8"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'10"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'0"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'2"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'4"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'6"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'8"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'10"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
3'0"	7'0"	1-3/8"	3/8"	3	4	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A

SL130



Width	Height	Thickness	Groove Width	No. of Vertical Grooves	Horizontal Grooves	No. of Stiles	Stile Width	No. of Panels	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
1'8"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
1'10"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'0"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'2"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'4"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'6"	6'8"	1-3/8"	1/8"	1	3	1	5"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'8"	6'8"	1-3/8"	1/8"	1	3	1	6"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
2'10"	6'8"	1-3/8"	1/8"	1	3	1	6"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A
3'0"	6'8"	1-3/8"	1/8"	1	3	1	6"	4	19-13/16" Top Panel 19-5/8" Bottom Panel 19" Center Panels	N/A	N/A	0	0	N/A



TRIA™

ELEGANT WOOD COMPOSITE DOORS


TRIA™ doors present so many design possibilities. Options include carved, clean lines and architectural details. You can even design your own. Their construction helps them stand up to everyday life, and their core works hard to keep noise from traveling. TRIA doors add charm to any room.

TRIA™ DOOR OPTIONS

STICKING PROFILES


C-SERIES

Seamless, solid surface with raised panels and two etched profile choices



STANDARD

A wider groove for a traditional look and style




OGEE

A narrower groove for a sleeker and slimmer detail


L-SERIES

Square profiles with true shadow lines and Shaker panel design



NO STICKING

A wider groove for a traditional look and style




SQUARE STICKING

A narrower groove for a sleeker and slimmer detail


R-SERIES

Three molding options with real inlaid pieces and precision detailing




STANDARD

Standard molding profile



ARCHITECTURAL

A more intricate molding profile




DESIGNER


A more modern profile design

TRIA™ DOOR OPTIONS


AVAILABLE SIZES



WIDTHS BETWEEN 1'0" - 4'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1-3/8" OR 1-3/4"


CORE OPTIONS



FOAM CORE

Wood frame

Available only in the C-Series




FIRE CORE

Wood frame

Available in C, L and R-Series



20-, 60- and 90-minute fire rating



SOLID CORE

Wood frame

Available in C, L and R-Series




20-minute fire rating


SPECIALTY INSERT OPTIONS

- Chalkboard
- Dry erase
- Mirror
- Glass


MOST POPULAR C-SERIES/R-SERIES/L-SERIES DESIGN OPTIONS




C2020
R2020
L2020
6'8", 7'0" & 8'0"




C2030
R2030
L2030
6'8", 7'0" & 8'0"




C2030V
6'8", 7'0" & 8'0"




C2040
R2040
6'8", 7'0" & 8'0"




C2050
R2050
6'8", 7'0" & 8'0"




C3000
R3000
L3000
6'8", 7'0" & 8'0"




C3070
R3070
L3070
6'8", 7'0" & 8'0"




C3240
R3240
L3240
6'8", 7'0" & 8'0"




C3340
R3340
6'8", 7'0" & 8'0"



C4100
R4100
L4100
6'8", 7'0" & 8'0"




C5000
R5000
L5000
6'8", 7'0" & 8'0"




C1000
R1000
L1000
6'8", 7'0" & 8'0"

SERIES: C = RAISED PANEL, R = RAISED MOLDING, V = V-GROOVES, L = FLAT PANEL


C-SERIES / R-SERIES DESIGN OPTIONS




C1000 ■
R1000† ◆




C1010
R1010




C1020
R1020




C1030
R1030




C1040
R1040



C1050
R1050



C2000 ◆
R2000 ◆




C2010
R2010




C2020 ◆
R2020 ◆




C2030
R2030




C2040
R2040




C2050
R2050




C2070
R2070




C2080
R2080



C2090
R2090




C2130
R2130




C2140
R2140




C2160
R2160




C2200
R2200




C2210
R2210




C3000 ◆
R3000 ◆




C3010
R3010




C3020
R3020




C3040
R3040




C3050
R3050



C3060
R3060



C3070 ◆
R3070 ◆




C3090
R3090




C3100
R3100




C3110
R3110




C3150
R3150




C3160
R3160




C3170
R3170




C3180
R3180




C3190
R3190



C3200
R3200



C3210
R3210




C3220
R3220




C3230
R3230




C3240
R3240




C3250
R3250




C3260
R3260



C3270
R3270



C3300
R3300



C3310
R3310



C3340
R3340



C4000
R4000




C4010
R4010




C4020
R4020



C4030
R4030




C4050
R4050




C4060
R4060




C4070
R4070




C4080
R4080



C4090
R4090



C4100 ◆
R4100 ◆



C4110
R4110



C4120
R4120



C4130
R4130



C4140
R4140

C4150 R4150	C4160 R4160	C4170 R4170	C4180 R4180	C4190 R4190	C4200 R4200	C4210 R4210	C4220 R4220	C5000 R5000◆	C5010 R5010
C5020 R5020	C5030 R5030	C5040 R5040	C5050 R5050	C5060 R5060	C5070 R5070	C5080 R5080	C5100 R5100	C5110 R5110	C5120 R5120
C5210 R5210	C6000 R6000	C6010 R6010	C6020 R6020	C6030 R6030	C6050 R6050	C6070 R6070	C6080 R6080	C6090 R6090	C6100 R6100
C6110 R6110	C6120 R6120	C7010 R7010	C7020 R7020	C8000 R8000◆	C8010 R8010	C9000 R9000	C9010 R9010		
C1000V	C1030V	C1050V	C1060V	C1070V	C1080V	C1090V	C2020V	C2030V	C2190V

R-Series architectural and designer raised moldings only available in 1-3/4" doors, and not available in all radius, eyebrow or reverse designs
Bifold doors (flat back inside) available in all designs except C9000 and R3310


■ Chalkboard, dry erase and mirror specialty inserts are available in C1000 design (with a small bottom panel added) on the reverse side of any C-Series door design in 6'8" and 8'0"

† Mirror specialty insert is available in R1000 design (with a small bottom panel added) on the reverse side of any R-Series door design in 1-3/8" and 1-3/4" in 6'8" and 8'0"


◆ Glass options are available in R-Series in 1-3/8" and 1-3/4" in 6'8", 7'0" and 8'0"

SERIES: C = RAISED PANEL, R = RAISED MOLDING, V = V-GROOVES


L-SERIES DESIGN OPTIONS




L1000 ■◆




L2000 ◆




L2020 ◆




L3000 ◆




L3010



L3060 ◆




L3070




L3100




L3190




L3220




L3240




L3250



L4000




L4060




L4100 ◆



L4110




L4140




L4200




L5000 ◆




L5030



L5060




L5080



L6000




L6010




L6020




L6050




L6080




L6110




L7010



L7020



L8000 ◆



L9000


Bifold doors (flat back inside) available in all designs except L9000

■ Chalkboard, dry erase and mirror specialty inserts are available in L1000 design (with a small bottom panel added) on the reverse side of any L-Series door design in 6'8" and 8'0"

◆ Glass options are available in L-Series in 1-3/8" and 1-3/4" in 6'8", 7'0" and 8'0"

SERIES: L = FLAT PANEL



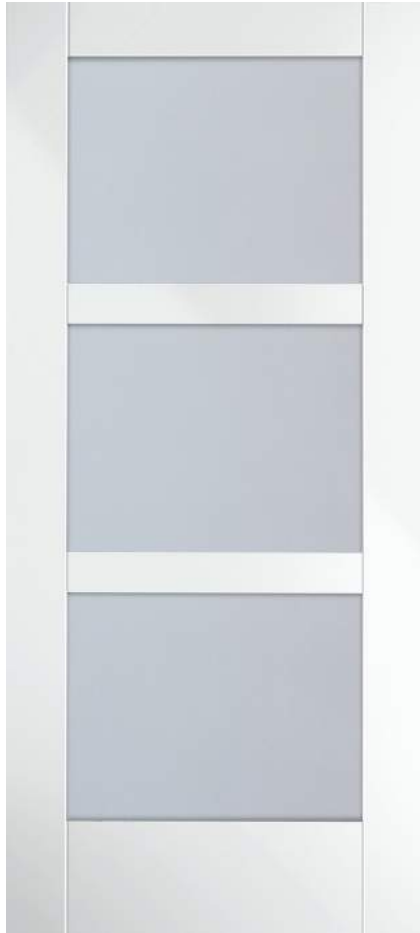


MODA®


The MODA® Collection of interior doors plays up simplicity and clean lines. Choose from 21 unique styles with solid, translucent glass, mirror or clear glass panel options. MODA doors are an excellent way to add sophistication to any space. Conceal or reveal with MODA doors. Regardless of the panel configuration you choose, MODA doors allow you to create a consistent look throughout your home.

MODA® DOOR OPTIONS


PANEL OPTIONS




SOLID PANEL



CLEAR GLASS




TRANSLUCENT GLASS



MIRROR

A full lite mirror on one side and your choice of 21 panel options on the opposite side*

STICKING PROFILES



FLAT PANEL

FINISH OPTIONS




PRIMED




RUSTIC

AVAILABLE SIZES


10" bottom rail is ADA-compliant and comes standard. Custom sizes available.




6 WIDTHS BETWEEN 1'6" - 3'0"



HEIGHTS OF 6'8" OR 8'0"

THICKNESS OF 1-3/8"
RAIL WIDTHS IN 2" OR 3-5/8"

CORE OPTIONS



SOLID CORE


All-wood frame




20-minute
fire rating

*Mirror available on panel door only. No design option available over mirror.
Additional lead times required.


DESIGN OPTIONS




PMC1011
PMP1011
PMT1011
6'8" & 8'0"




PMC1023
PMP1023
PMT1023
6'8" & 8'0"




PMC1023N
PMP1023N
PMT1023N
6'8" & 8'0"




PMC1024
PMP1024
PMT1024
6'8" & 8'0"




PMC1024N
PMP1024N
PMT1024N
6'8" & 8'0"




PMC1031
PMP1031
PMT1031
6'8" & 8'0"




PMC1031N
PMP1031N
PMT1031N
6'8" & 8'0"




PMC1032
PMP1032
PMT1032
6'8" & 8'0"



PMC1033
PMP1033
PMT1033
6'8" & 8'0"



PMC1035
PMP1035
PMT1035
6'8" & 8'0"




PMC1035N
PMP1035N
PMT1035N
6'8" & 8'0"




PMC1036
PMP1036
PMT1036
6'8" & 8'0"


PMP = PANEL, PMT = TRANSLUCENT, PMC = CLEAR




PMC1036N
PMP1036N
PMT1036N
6'8" & 8'0"




PMC1044
PMP1044
PMT1044
6'8" & 8'0"




PMC1044N
PMP1044N
PMT1044N
6'8" & 8'0"




PMC1055
PMP1055
PMT1055
6'8" & 8'0"




PMC1055N
PMP1055N
PMT1055N
6'8" & 8'0"



PMC1066
PMP1066
PMT1066
6'8" & 8'0"



PMC1066N
PMP1066N
PMT1066N
6'8" & 8'0"



PMC1071
PMP1071
PMT1071
6'8" & 8'0"



PMC1072
PMP1072
PMT1072
6'8" & 8'0"



AUTHENTIC WOOD


RICH BEAUTY IN EVERY STYLE

Authentic wood doors showcase warmth and elegance. They elevate the sophistication of any room. Choose from a variety of wood species, panel configurations and glass options for a customized look.

AUTHENTIC WOOD DOOR OPTIONS

WOOD SPECIES

We offer a variety of wood species to match the look you want for your home. Receive your door primed to add your own paint color.



Primed




Sustainable
Pine



Sustainable
Knotty Pine



Knotty Alder




Oak


Additional species available via special order. Contact your JELD-WEN sales representative for more details.

STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




1/2" FLAT PANEL
PROFILE P, O




3/4" DOUBLE-HIP
RAISED PANEL KA




3/4" DOUBLE-HIP
RAISED PANEL PROFILE SP




3/4" SINGLE-HIP
RAISED PANEL PROFILE O



3/4" V-GROOVE PANEL KA




9/16" SINGLE-HIP
RAISED PANEL PROFILE KP




9/16" V-GROOVE
PANEL PROFILE KP


AVAILABLE SIZES



6 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8" OR 8'0"




THICKNESS OF 1-3/8"


RAISED PANEL




0022 KA
6'8" & 8'0"




0028 SP, KA, O
6'8" & 8'0"



0044 SP
6'8" & 8'0"



0066 SP, KP, O
6'8" & 8'0"




0028V KA
6'8" & 8'0"
V-Groove


Additional designs available via special order. Contact your JELD-WEN sales representative for more details.

SPECIES: P = PRIMED, SP = SUSTAINABLE PINE, O = OAK, KP = KNOTTY PINE, KA = KNOTTY ALDER


FLAT PANEL




1011 P
6'8" & 8'0"




1022 P
6'8" & 8'0"




1033 P, O
6'8" & 8'0"




1035 P
6'8" & 8'0"



1055 P
6'8" & 8'0"




0028V KP, KA
6'8" & 8'0"
V-Groove




0022V KP
6'8" & 8'0"
V-Groove


LOUVERS



0730P P
6'8" & 8'0"
Plantation
2-1/4" Slats




0732P P
6'8" & 8'0"
Plantation
2-1/4" Slats




0730 P, SP
6'8" & 8'0"
Traditional
1-1/4" Slats

FRENCH DOORS


Door designs available with clear glass only.



1501 P, SP
6'8" & 8'0"




1509 P, SP
6'8" & 8'0"




1510 P, SP, O
6'8" & 8'0"




1505 P, SP
6'8" & 8'0"




1515 P, SP, O
(2'4" TO 3'0")
6'8" & 8'0"



1512 P, SP
6'8" & 8'0"





1506 P, SP
6'8" & 8'0"





1518 P, SP
6'8" & 8'0"

SPECIES: P = PRIMED, SP = SUSTAINABLE PINE, O = OAK DOORS

DECORATIVE GLASS SELECTIONS

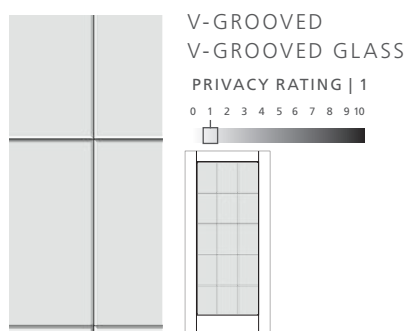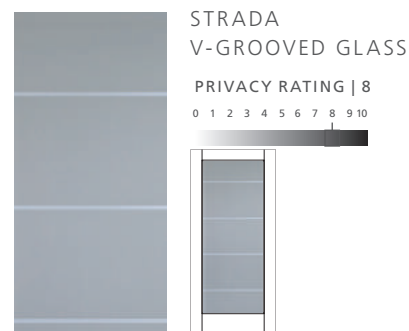

DECORATIVE GLASS DOORS





© 2023 JELD-WEN, Inc. All rights reserved. | JELD-WEN, the JELD-WEN Logo, the JW Logo, CAIMAN, CAMDEN, CARRARA, COLONIST, CONMORE, MADISON, MODA, MONROE, and PROCORE are registered trademarks of JELD-WEN, Inc. BIRKDALE, CAMBRIDGE, CONTINENTAL, CRAFTSMAN III, IMPRESSION MIRROR, RECIPE PANTRY, ROCKPORT, SANTA FE, STATEMENT COLLECTION, STUDIO COLLECTION, TRIA, and WOODVIEW COLLECTION are trademarks of JELD-WEN, Inc.

JELD-WEN is proud to be part of the JELD-WEN global family of product brands and companies.

10-96390 3/23